
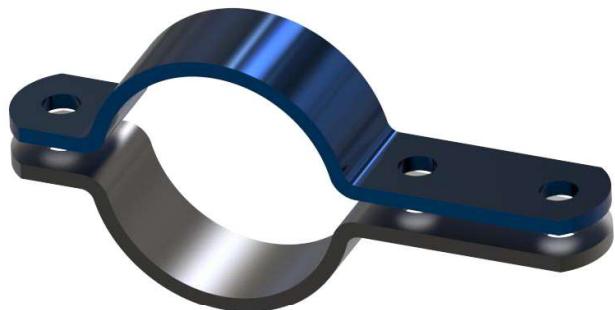


# Obejma na rury z zaokrąglonymi końcami wg DIN 3567 Typ B

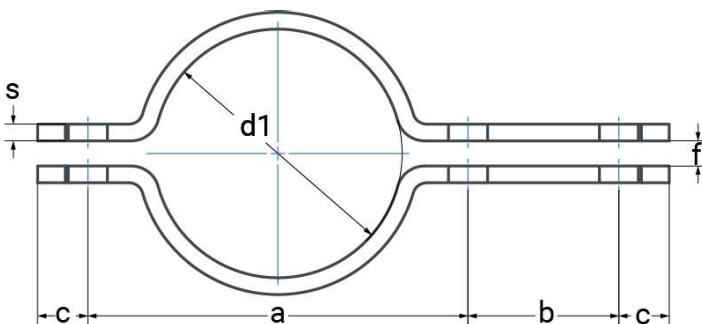

Materiały wytwórcze:

- S235 ► 1.4301 ► 1.4571 ► 13 CrMo4-5
- 16Mo3

Typy powierzchni pokrycia:

- stal surowa ► ocynk ogniodporny

Zastosowanie do rur o średnicy DN	d1	a	b	c	d2	f	b x s	Dedykowane śruby (dł.min)	100 par = kg bez śrub	Nr produkту
15	20	57						M 10x35	28	201010
	½"	21,3	59						29	201012
20	25	62						M 10x35	31	201014
	¾"	26,9	66						32	201016
25	30	68						M 10x35	33	201018
	1"	33,7	72						35	201020
32	38	76						M 10x35	36	201022
	1 ¼"	42,4	82						38	201024
40	44,5	84						M 10x35	39	201026
	1 ½"	48,3	88						40	201028
50	57	104						M 12x40	76	201030
	2"	60,3	108						77	201032
65	76,1	122						M 12x40	85	201034
80	88,9	136							95	201036

Zastosowanie do rur o średnicy DN	d1	a	b	c	d2	f	b x s	Dedykowane śruby (dł.min)	100 par = kg bez śrub	Nr produktu	
100	108	172	70	24	18	11	50x8	M 16x55	203	201040	
	4"	114,3							206	201042	
125	133	196	86	30	23	14	60x8		220	201044	
	5"	139,7							225	201046	
150	159	222	104	36	27	18	70x10		240	201048	
	6"	168,3							252	201050	
175	193,7	258	120	40	30	20	30x10		280	201052	
	7"	216							300	201054	
200	219,1	284	140	50	40	30	30x10		310	201056	
	8"	267							440	201060	
250	273	348	140	50	40	30	30x10		450	201062	
	10"	342							510	201066	
300	323,9	398	140	50	40	30	30x10	M 20x60	575	201068	
350	355,6	432							595	201070	
	368	444							960	201072	
400	406,4	498							980	201074	
	419	510							1035	201076	
450	457,2	548	140	50	40	30	30x10	M 24x60	1130	201078	
500	508	600							1150	201080	
	521	614							1352	201082	
600	609,6	702							2180	201084	
700	711,2	830							2410	201086	
800	812,8	930	140	50	40	30	30x10	M 27x80	2655	201088	
	914,4	1030							3740	201090	
1000	1016	1130	140	50							